


INSTALLATION: Dimensions

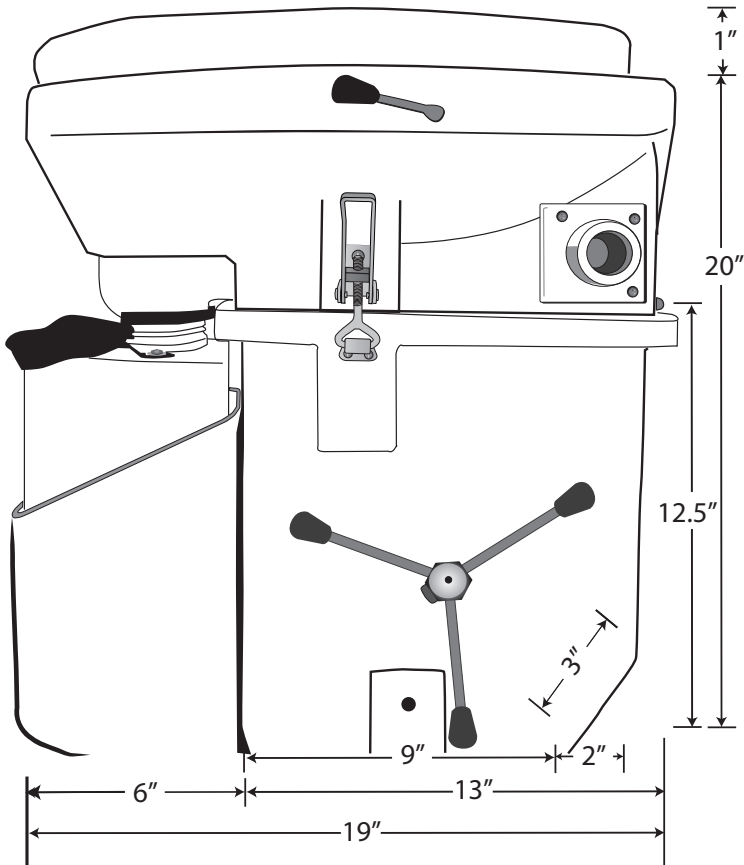


Note:

Dimensions can vary up to 4% due to the rotational moulding of polyethylene plastic.

Please note as stated in our instructions the following:

- Allow approximately 1.5 inches behind toilet if against a bulkhead or wall for the bowl to tilt for servicing.
- To disengage the bowl from the base, face the toilet. The bowl slides to the left 2 inches to disconnect from the slip hinge.
- Handle and agitator, as well as the fan housing, can be switched to either side (Please see our instructional videos on YouTube-our channel is [natureshead5630](#)).

INSTALLATION: Dimensions

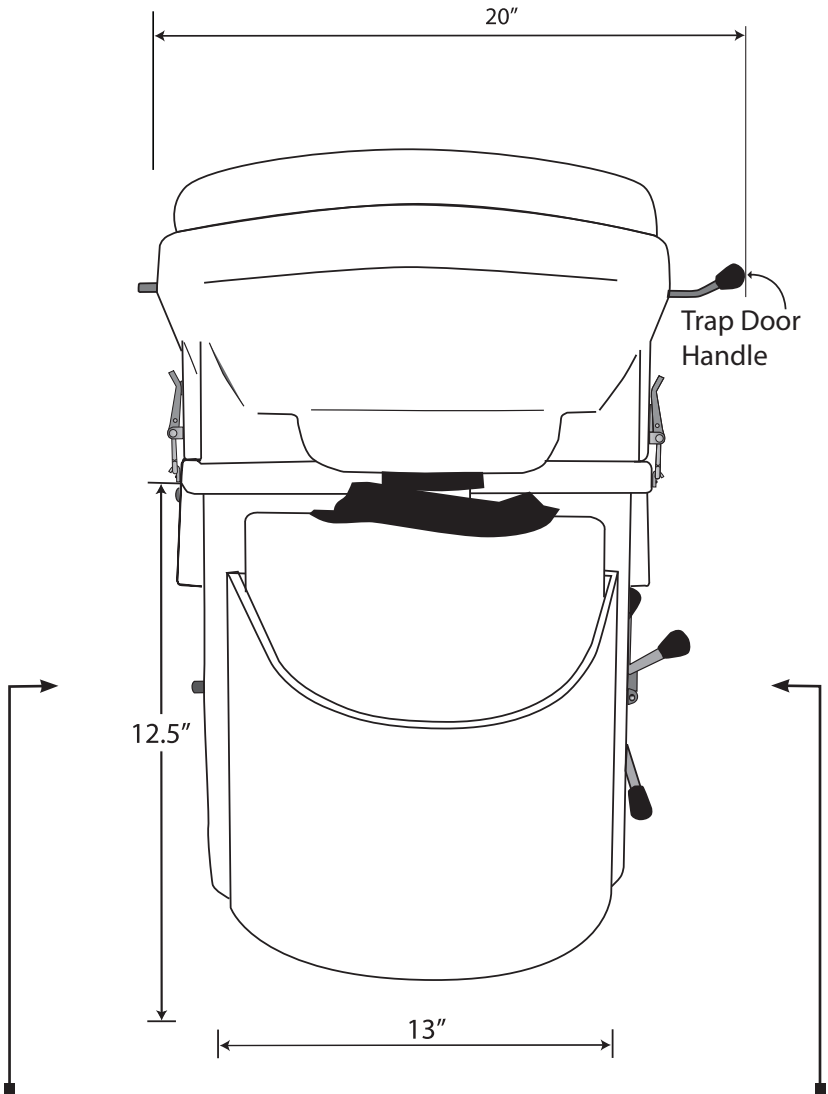

- If handle is installed on this side, the spider does not require additional space beyond the toilet
- The foot spider handle takes up 1/2 inch additional space
- If handle is installed on the side with trap door handle, neither handle extends beyond the trap door handle.