


RX5600




Busbar 600 A with 5 high current terminals and 8 low current screw terminals, without cover

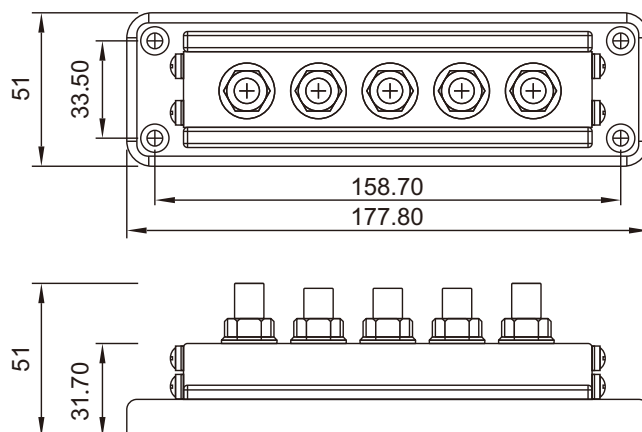

RX8600



Busbar 600 A with 8 high current terminals and 8 low current screw terminals, without cover

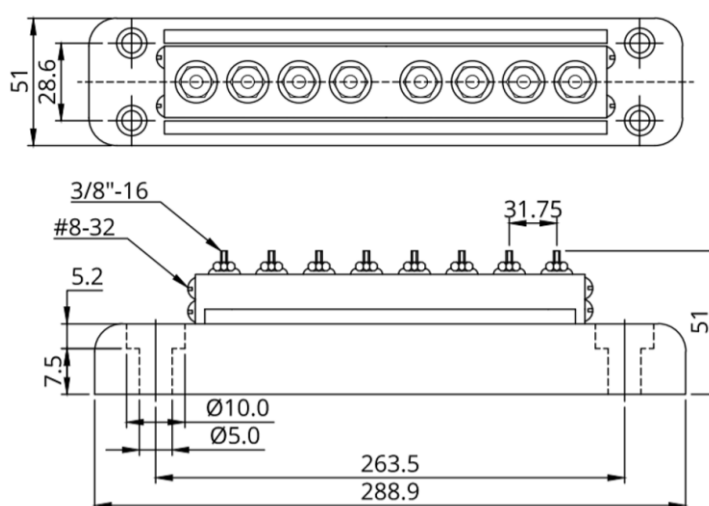

Busbar 600 A with cover	
Max. current	600 A
Max. Voltage	70 VDC
Terminal diameter	3/8 inch / 9.53 mm
Terminal height	0.76 inch / 19 mm
Terminal material	Stainless steel
Flange nut material	Stainless steel
Recommended torque	180 lbf·inch / 20 N·m
Screw terminals	diameter #8 (0.164 inch) / 4.2 mm
Screw material	Stainless steel
Recommended torque	17 lbf·inch / 2 N·m
Busbar material	Tin-plated copper (19 x 24 mm)
Base material	ABS, black, UL 94 V-0
Cover material	ABS, black, UL 94 V-2
Weight(RX5600)	1.7 lb / 0.75 kg
Dimensions (HxWxD) (with cover)	2.2 x 8 x 2.2 inch / 55 x 204 x 56 mm
Weight(RX8600)	2.9 lb / 1.3 kg
Dimensions (HxWxD) (with cover)	2.2 x 12.4 x 2.2 inch / 56 x 316 x 56 mm