

UVC LED Technology

Watersprint Core®

Next Generation Whole House Water Disinfection System

Watersprint Core® is our most advanced UVC LED water disinfection system, designed and produced in Sweden with high quality, versatility, compact design, and cost efficiency in mind.

Two Models, One Technology

The Watersprint Core® product family features two distinct models, both powered by the same innovative UVC LED technology. Each model is tailored to meet different customer needs, offering optimized performance for varying flow rates:

- Watersprint Core® 20 for flow rates up to 8 gpm.
- Watersprint Core® 40 for flow rates up to 16 gpm.

Lasting Performance

Allowing homeowners to enjoy a robust, reliable, and compact system that fits seamlessly into their home, this water disinfection solution offers peace of mind. With easy installation, plumbers and installers can quickly set up the system, ensuring a smooth experience for the homeowner. The low-maintenance design translates to hassle-free ownership, requiring minimal attention over time. Built for durability, the system provides long-lasting performance, offering the homeowner years of worry-free, safe water.

Automatic and Instant Start

Thanks to the external flow sensor and control unit, the UVC LEDs automatically activate when water flow is detected. Unlike other UV light sources, the UVC LEDs provide full output instantly without any warm-up time, ensuring that water is disinfected from the moment it begins to flow.

Low Power Consumption

Since our water disinfection system enters standby mode when no water is flowing, it achieves significantly lower power consumption compared to conventional systems, using less than 1W in standby mode. Also, since the light source is off when no water is flowing, there will be no heat transfer to the water.




Hygienic Pulsing™

To ensure excellent water quality, we have added Hygienic Pulsing™, a Watersprint Safety Feature that automatically activates the system during periods of inactivity.

Advantages of UVC LED Technology

- **Mercury-Free Technology:** UVC LEDs do not contain mercury, making them safer for the environment and easier to handle compared to conventional UV lamps.
- **Simple Handling:** UVC LEDs are user-friendly during their active lifespan and thereafter, ensuring easy disposal and maintenance.
- **Space-Saving Design:** The compact size of UVC LEDs allows for more efficient, space-saving designs in water disinfection systems.
- **No Fragile and Bulky Glass Tubes:** Unlike conventional UV lamps, UVC LEDs do not contain fragile glass tubes, reducing the risk of breakage and increasing durability.
- **Longer Lifespan:** UVC LEDs have a longer operational life, providing reliable and consistent disinfection over time with minimal replacement needs.

Dimensions

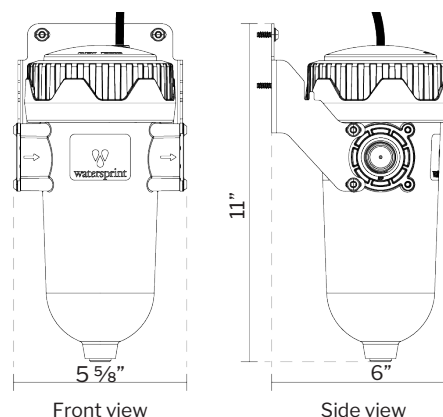

SPECIFICATION

Watersprint Core® UVC LED Water Disinfection System



Model	Watersprint Core® 20	Watersprint Core® 40
Release Date	Available now	Available now
Model Number	WS-40-2422	WS-40-2442
Flow Sensor for automatic and instant start	Yes	Yes
Hygienic Pulsing™ Safety Feature	Yes	Yes
Regulatory	RoHS, REACH, CE and NSF/ANSI 55 and NSF/ANSI 372 certified.	RoHS, REACH, CE and NSF/ANSI 55 and NSF/ANSI 372 certified.

DETAILED TECHNICAL DATA

Dimensions (HxW)	11" x 5 5/8"	11" x 5 5/8"
Connection size and type	Inlet: 3/4" MNPT Outlet: 3/4" FNPT	Inlet: 3/4" MNPT Outlet: 3/4" FNPT
Weight	4.4 lbs	4.4 lbs
IP rating	IP21	IP21
Electrical Characteristics		
Input rating	100-240 VAC, 50/60 Hz	100-240 VAC, 50/60 Hz
Power consumption	52W <1W in standby mode	52W <1W in standby mode
UVC LED replacement interval	3,000 active hours ¹	3,000 active hours ¹
Performance²		
16 mJ/cm² @ 95% UVT	8 gpm	16 gpm
30 mJ/cm² @ 95% UVT	5 gpm	10 gpm
Max. flow rate	8 gpm	16 gpm
Operating Conditions		
Water temperature	34–122°F	34–122°F
Ambient temperature	34–104°F	34–104°F
Max. water pressure	145 psi	145 psi
Pressure drop @ max. flow rate	<7.25 psi	<7.25 psi

¹At nominal water temperature of 77 ° F. Equivalent to 5–7 years of normal usage for a household of four.

²Based on third-party validated bioassay.